


# brevont

## FARO MINI SPIKE



## FAROMINISPIKE.AN.23.930

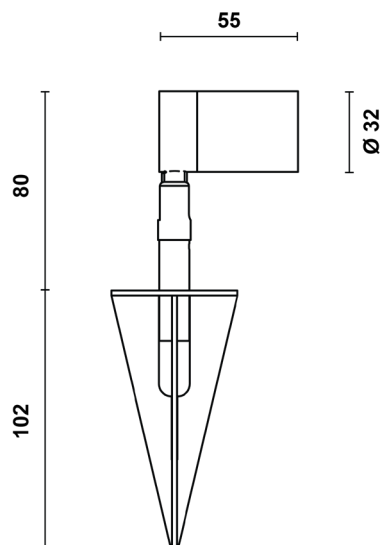

IP67

IK07



### Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	In-ground with 100mm spike
Size / Weight	Ø 32 55x182 mm / 0.4 Kg
Colour	Anthracite RAL7016 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

### Technical Data

Light Source	LED
CCT (K) / CRI	3000K / 80 CRI (90 on request)
Luminous Efficacy	91lm/W
Delivered Lumen	272lm
Beam Angle	23° (medium)
Power Consumption	3W
Current	900mA
Ingress Protection	IP67
Impact Resistance	IK07
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	60,000hrs

### Accessories (to be ordered separately)

FAROMINISPIKE.V.AN - FARO MINI SP VISOR ANTH. RAL7016  
FAROMINISPIKE.V.OG - FARO MINI SP VISOR OL. GR. RAL7002

FAROMINISPIKE.DRIVER.DALI - FARO MINI DRIVER DALI 30W IP20  
FAROMINISPIKE.DRIVER.ON-OFF - FARO MINI DRIVER ON-OFF