


# brevont

## FARO MINI SPIKE

## FAROMINISPIKE.OG.23.930

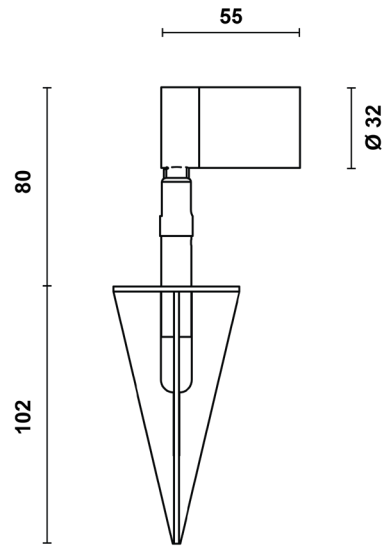

IP67

IK07



### Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

|                 |                                      |
|-----------------|--------------------------------------|
| Installation    | In-ground with 100mm spike           |
| Size / Weight   | Ø 32 55x182 mm / 0.4 Kg              |
| Colour          | Olive Grey RAL7002/ Brass swivel     |
| Body Material   | A2 stainless steel with Brass swivel |
| Screen Material | Tempered glass                       |
| Fixing Position | Full orientation capability          |
| Warranty        | 5 year warranty                      |

### Technical Data

|                       |                                   |
|-----------------------|-----------------------------------|
| Light Source          | LED                               |
| CCT (K) / CRI         | 3000K / 80 CRI (90 on request)    |
| Luminous Efficacy     | 91lm/W                            |
| Delivered Lumen       | 272lm                             |
| Beam Angle            | 23° (medium)                      |
| Power Consumption     | 3W                                |
| Current               | 900mA                             |
| Ingress Protection    | IP67                              |
| Impact Resistance     | IK07                              |
| Driver                | Remote (to be ordered separately) |
| Operating temperature | -30°C to 40°C                     |
| Rated life            | 60,000hrs                         |

### Accessories (to be ordered separately)

FAROMINISPIKE.V.AN - FARO MINI SP VISOR ANTH. RAL7016  
FAROMINISPIKE.V.OG - FARO MINI SP VISOR OL. GR. RAL7002

FAROMINISPIKE.DRIVER.DALI - FARO MINI DRIVER DALI 30W IP20  
FAROMINISPIKE.DRIVER.ON-OFF - FARO MINI DRIVER ON-OFF