


FARO MINI WALL

FAROMINIW.B.23.927

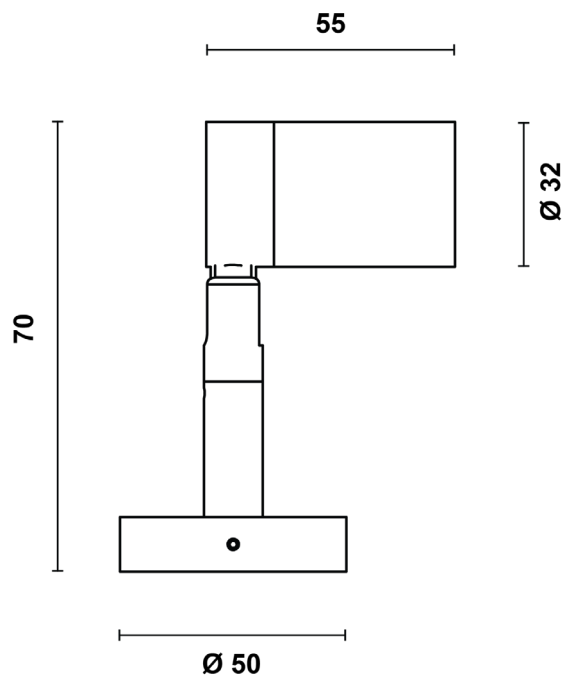

IP67

IK07



Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	Wall, floor, ceiling mounting
Size / Weight	Ø 32 50x55x70 mm / 0.2 Kg
Colour	Black RAL9005 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

Technical Data

Light Source	LED
CCT (K) / CRI	2700K / 80 CRI (90 on request)
Luminous Efficacy	85lm/W
Delivered Lumen	254lm
Beam Angle	23° (medium)
Power Consumption	3W
Current	900mA
Ingress Protection	IP67
Impact Resistance	IK07
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	60,000hrs

Accessories (to be ordered separately)

FAROMINIW.V.B - FARO MINI WALL VISOR BLACK RAL9005
 FAROMINIW.V.W - FARO MINI WALL VISOR WHITE RAL9003

FAROMINIW.DRIVER.DALI - FARO MINI DRIVER DALI 30W IP20
 FAROMINIW.DRIVER.ON-OFF - FARO MINI DRIVER ON-OFF