


brevont

FARO SPIKE



FAROSPIKE.AN.18.927

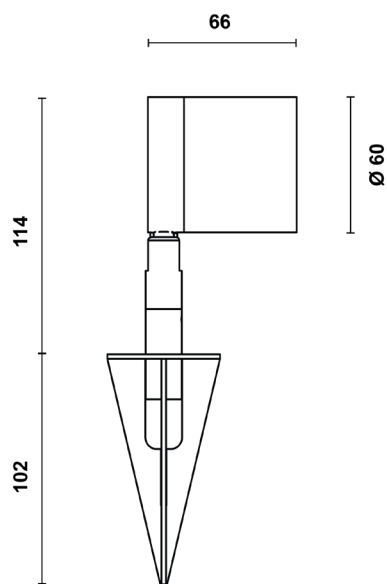

IP67

IK08



Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	In-ground with 100mm spike
Size / Weight	Ø60 66x216 mm / 0.7 Kg
Colour	Anthracite RAL7016 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

Technical Data

Light Source	LED
CCT (K) / CRI	2700K / 80 CRI (90 on request)
Luminous Efficacy	110lm/W
Delivered Lumen	1372lm
Beam Angle	18° (narrow)
Power Consumption	12.5W
Current	350mA
Ingress Protection	IP67
Impact Resistance	IK08
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	50,000hrs

Accessories (to be ordered separately)

FAROSPIKE.V.AN - FARO SPIKE VISOR ANTHRACITE RAL7016
FAROSPIKE.V.OG - FARO SPIKE VISOR OLIVE GREY RAL7002

FAROSPIKE.HL - FARO SPIKE HONEYCOMB LOUVRE
FAROSPIKE.DRIVER.DALI - FARO SPIKE DRIVER DALI 39W IP20