


## FARO SPIKE



## FAROSPIKE.AN.6.927

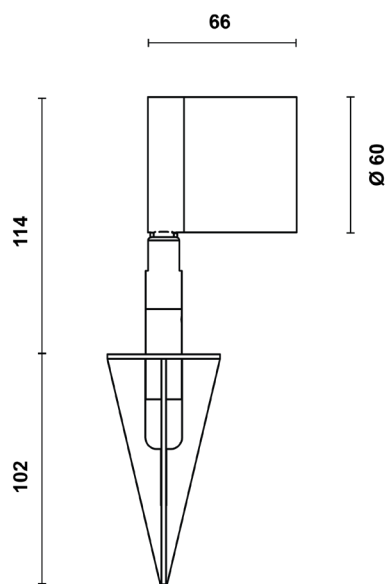

IP67

IK08



### Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	In-ground with 100mm spike
Size / Weight	Ø60 66x216 mm / 0.7 Kg
Colour	Anthracite RAL7016 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

### Technical Data

Light Source	LED
CCT (K) / CRI	2700K / 80 CRI (90 on request)
Luminous Efficacy	64lm/W
Delivered Lumen	192lm
Beam Angle	6° (ultra spot)
Power Consumption	3W
Current	1A
Ingress Protection	IP67
Impact Resistance	IK08
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	50,000hrs

### Accessories (to be ordered separately)

FAROSPIKE.V.AN - FARO SPIKE VISOR ANTHRACITE RAL7016  
 FAROSPIKE.V.OG - FARO SPIKE VISOR OLIVE GREY RAL7002

FAROSPIKE.HL - FARO SPIKE HONEYCOMB LOUVRE  
 FAROSPIKE.DRIVER.DALI.USPOT - FARO SPIKE DRIVER DALI 30W IP20