


# brevont

## FARO WALL

## FAROW.B.35.930

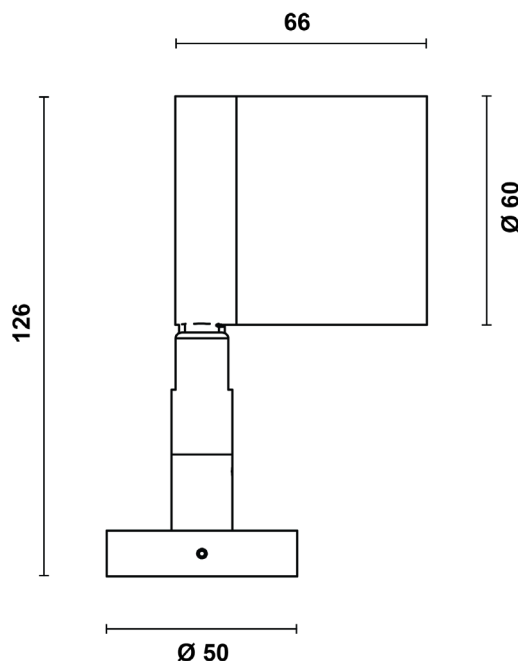

IP67

IK08



### Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	Wall, floor, ceiling mounting
Size / Weight	Ø60 50x66x126 mm / 0.5 Kg
Colour	Black RAL9005 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

### Technical Data

Light Source	LED
CCT (K) / CRI	3000K / 80 CRI (90 on request)
Luminous Efficacy	99lm/W
Delivered Lumen	1237lm
Beam Angle	35° (wide)
Power Consumption	12.5W
Current	350mA
Ingress Protection	IP67
Impact Resistance	IK08
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	50,000hrs

### Accessories (to be ordered separately)

FAROW.V.B - FARO WALL VISOR BLACK RAL9005  
FAROW.V.W - FARO WALL VISOR WHITE RAL9003

FAROW.HL - FARO WALL HONEYCOMB LOUVRE  
FAROW.DRIVER.DALI - FARO WALL DRIVER DALI 39W IP20