


# brevont

## ORBITA PLASTER-IN ADJUSTABLE

## ORB.PL.AD.W.B.15.927.PD

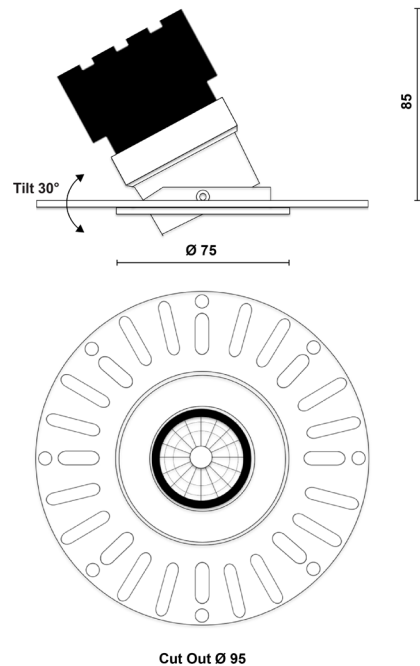

### Product Information

75MM Adjustable Architectural Downlight LED High CRI IP54 Plaster-in installation

Installation	Ceiling recessed
Size	Ø75x85 mm / Cut out Ø95
Skim Plate	Ø145mm
Bezel Finish	White RAL9010 fine texture
Baffle Finish	Black RAL9005
Bezel Finish Options	Black, bronze, copper (on request)
Baffle Finish Options	White, bronze, copper (on request)
Fixing Position	Adjustable
Warranty	5 year warranty

### Technical Data

Light Source	LED
CCT (K) / CRI	2700K / 98 CRI
Luminous Efficacy	91lm/W
Engine Lumens	1250lm
Beam Angle	15°
Power Consumption	13.8W
Current	350mA
Ingress Protection	IP54
Driver	Remote Mains Dim driver (included)
Rated life	50,000hrs

### Accessories (to be ordered separately)

ORB.PL.AD.HCL - ORBITA HONEYCOMB LOUVRE  
ORB.PL.AD.BSL - ORBITA SOFTENING LENS

ORB.PL.AD.F - ORBITA FIRE COLLAR (ON REQUEST)  
ORB.PL.AD.IP65 - ORBITA IP65 LENS / RUBBER GASKET (ON REQUEST)