


brevont

FARO WALL

FAROW.B.6.927

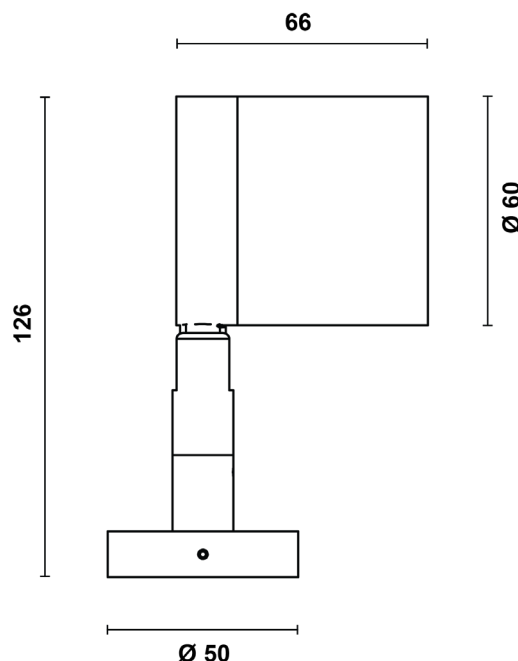

IP67

IK08



Product Information

Super compact LED luminaire for the enhancement of landscape and architectural details through refined accent lighting effects.

Installation	Wall, floor, ceiling mounting
Size / Weight	Ø60 50x66x126 mm / 0.5 Kg
Colour	Black RAL9005 / Brass swivel
Body Material	A2 stainless steel with Brass swivel
Screen Material	Tempered glass
Fixing Position	Full orientation capability
Warranty	5 year warranty

Technical Data

Light Source	LED
CCT (K) / CRI	2700K / 80 CRI (90 on request)
Luminous Efficacy	64lm/W
Delivered Lumen	192lm
Beam Angle	6° (ultra spot)
Power Consumption	3W
Current	1A
Ingress Protection	IP67
Impact Resistance	IK08
Driver	Remote (to be ordered separately)
Operating temperature	-30°C to 40°C
Rated life	50,000hrs

Accessories (to be ordered separately)

FAROW.V.B - FARO WALL VISOR BLACK RAL9005
FAROW.V.W - FARO WALL VISOR WHITE RAL9003

FAROW.HL - FARO WALL HONEYCOMB LOUVRE
FAROW.DRIVER.DALI.USPOT- FARO WALL DRIVER DALI 30W IP20